



Stadtteilzentrum Desi e.V. - „Desi“
Brückenstraße 23
90419 Nürnberg
www.desi-nbg.de

contact

l.knoll@desi-nbg.de
veranstaltungstechnik@desi-nbg.de
+49 911 / 336943

Venue Specs

1. Capacity	2
2. Infrastructure	2
3. Stage information	3
4. Sound information	4
5. Lightning information	6
6. Attachment	7

1. Capacity

Depending on the desired stage area or other installations and structures, the maximum capacity is up to 199 people standing and up to 110 people seated. The valid capacity must be agreed with Desi office in advance. It is possible to reduce the space with a dividing curtain.

2. Infrastructure

Parking, loading & storage capacity

The parking options can be found on the directions map, the loading distance from the parking lot is approx. 15m. There is only a very limited storage space for cases, material and backline. If this is not sufficient, the empties must be loaded back into the transporter. A parking space for Nightliner is available (power supply: CEE 16A, 400V, 3P+N+E).




Backstage

The backstage is accordingly equipped with a mirror, seating, refrigerator and WiFi. There is access to a separate shower and toilet.

„Saal“

Room size	ca. 100m ²
Room width	10m
Room length	11m
Room depth dividing curtain	7,5m
Room height	5m
Clear height spotlight	3m - 4m
Traffic loads	500kg/m ²

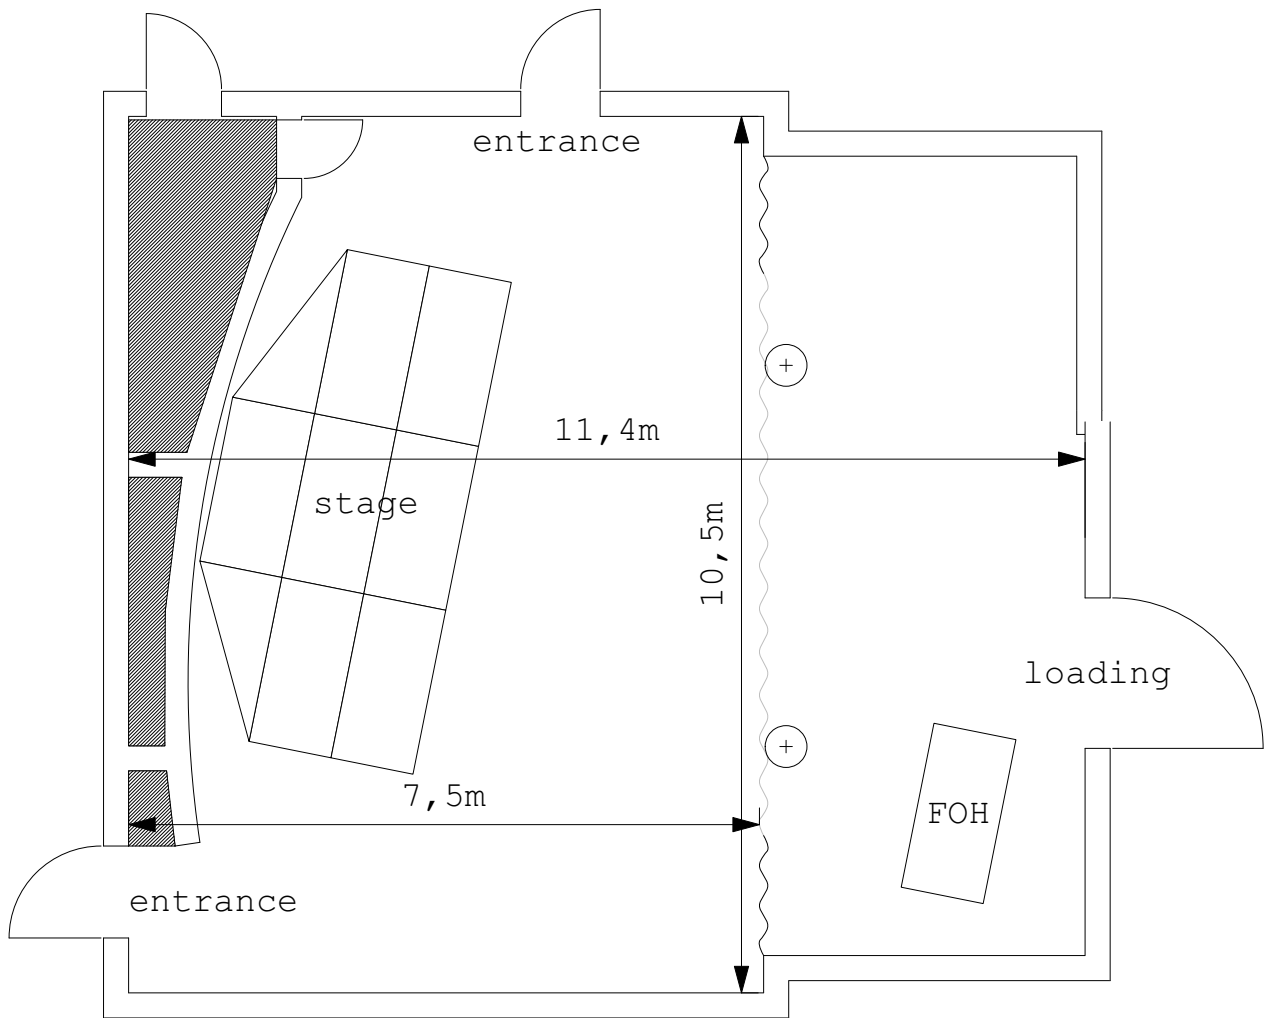

Power supply

All electrical systems are tested according to DIN VDE 0105-100 and are handed over by the local technically trained staff.

Stage	1x CEE 16A, 400V, 3P+N+E
Technical storage stage (SL)	6x Schuko 16A, 230V, 3P+N+E
FOH	2x Schuko 16A, 230V, 3P+N+E

3. Stage information

The hall has a mobile stage with the possibility of expanding the stage size up to 6m x 4m. A stage staircase can be attached to all sides of the stage. There is only a very limited possibility of attaching a backdrop

Stage size	Ca. 16m ²
Stage width	6m
Stage depth	max. 4m
Stage height	0,6m

4. Sound information

In order to be able to offer our audience an optimal concert experience, we would like an average volume level of max. 99db(A) (according to DIN 15905 - Part 5) during the show. In this way we want to protect the audience from excessive sound pressure levels. An XL2 from NTI Audio is provided for sound level measurement. At club events, the volume level is limited to 94db(A) and documented by the Dateq SPL6 limiter.

PA

amplifier Coda Linus 14
 Top 6x Coda NAPS
 Sub 6x Coda NSUB

The handover (LR analogue) takes place at the FOH or on the stage (SL).

Monitoring

amplifier Coda Linus 10
 Monitor 4x Coda G712

There are basically four monitors available in four ways. Should additional requirements be necessary, a brief agreement is required. The signals are handed over on the stage (SL).

Mixing console

FOH: 1x Allen & Heath SQ6
 Stagebox: 2x Allen & Heath DT168

Multicore

8x analog In/Out
 2x Cat7 (30m)

Microphones

number	manufacturer	model
1	Shure	Beta91A
1	Shure	Beta 52A
4	Sennheiser	E604
3	Oktava	MK-012-01
2	Rode	NT5
5	Shure	SM57
1	Shure	SM57beta
1	Sennheiser	e906
5	Shure	SM58 (1x Beta 58)
1	Audix	Om7
1	Shure	SM58 Schalter

DI Boxes

number	manufacturer	model
2	BSS Audio	AR-133 Active D.I.
1	Klark Teknik	DN200 Active Stereo DI Box
2	Palmer	Aktive DI Box Pan 02
2	Stage Line	DIB-100 Direkt Box
2	Palmer	Pro Media specialized DI Box PLI04

Wireless microphones

number	manufacturer	model
2	Sennheiser	Ew G4 e945
2	DPA	4088

DJ gear

No headphones, systems or needles will be provided.

number	manufacturer	model
1	Allen & Heath	Xone92
1	Pioneer	DJM900nxs
2	Pioneer	CDJ2000nxs
4	Technics	1210

Wiring and accessories

There are enough microphone stands, extension boxes, and necessary cables (XLR, Speakon, Schuko, etc...)

5. Lightning information

The house lights is controlled via. DMX. The addressing can be found in the DMX Patch.

Mixing console Chamsys MQ60

spotlights

Number	manufacture	model	Type
2	Expolite	Fresnel-LED WW	Fresnel
1	Expolite	Profile-Des Exlipse 600	Profiler
4	Expolite	Tour LED 42CM PC	LED PAR
2	Expolite	TourBlinder 100 DTR	Blinder
8	Varytec	LED Typhon PAR Outdoor	LED PAR
4	Expolite	ELF 24CM	LED Stick
4	Expolite	TourSpot50 mini	Movinghead
3	fungeneration	LED Pot Strobe 100	Strobe
1	Smokefactory	Tourhazer 2	Hazer
1	Smokefactory	Spaceball II	Nebelmaschine

Media information

There is a permanently installed crank screen and a projector. It can only be controlled via HDMI.

Projector Epson EB-730U (1920px x 1200 px / 7000ansilumen)

6. Attachment

Escape and emergency routes



Pictures

